











n-type TOPCon BIFACIAL MODULE



RSM144-10-575BNDG-600BNDG

144 CELL n-type Module	575-600Wp Power Output Range
1500VDC Maximum System Voltage	22.2% Maximum Efficiency

KEY SALIENT FEATURES

-  Global Tier1 PV module manufacturer
-  n-type solar cell without LID caused by B-O , power degradation in 1st year is no more than 1%
-  Better Temperature Coefficient
-  Bifacial technology enables additional energy harvesting from rear side (up to 30%)
-  Excellent low irradiance performance
-  Excellent PID resistance
-  Positive power tolerance of 0~+3%
-  Module Imp binning radically reduces string mismatch loss
-  Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
-  Comprehensive product and system certification
 - ◆ IEC61215:2016; IEC61730-1/-2:2016;
 - ◆ ISO 9001:2015 Quality Management System
 - ◆ ISO 14001:2015 Environmental Management System
 - ◆ ISO 45001:2018 Occupational Health and Safety Management System



* As there are different certification requirements in different markets, please contact your local Risen Energy sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

RISEN ENERGY CO., LTD.

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.


Tashan Industry Zone, Meilin, Ninghai 315609, Ningbo | PRC

Tel: +86-574-59953239 Fax: +86-574-59953599

E-mail: marketing@risenenergy.com Website: www.risenenergy.com

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30 year Linear Power Warranty

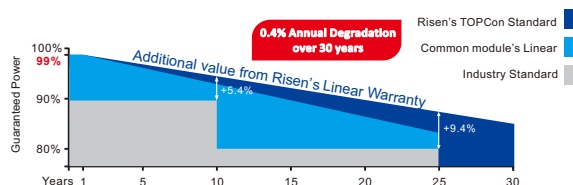


★ Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd



Preliminary
For Global Market

Dimensions of PV Module Unit: mm

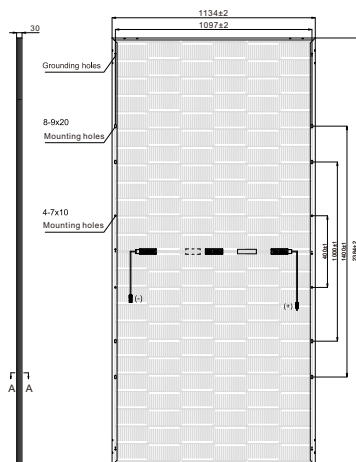

ELECTRICAL DATA (STC)

Model Number	RSM144-10-575BNDG	RSM144-10-580BNDG	RSM144-10-585BNDG	RSM144-10-590BNDG	RSM144-10-595BNDG	RSM144-10-600BNDG
Rated Power in Watts-Pmax(Wp)	575	580	585	590	595	600
Open Circuit Voltage-Voc(V)	51.07	51.28	51.48	51.67	51.86	52.05
Short Circuit Current-Isc(A)	14.39	14.44	14.50	14.55	14.61	14.66
Maximum Power Voltage-Vmpp(V)	42.44	42.61	42.78	42.94	43.10	43.25
Maximum Power Current-Impp(A)	13.57	13.63	13.70	13.76	13.83	13.89
Module Efficiency (%) *	21.3	21.5	21.6	21.8	22.0	22.2

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
Bifacial factor: 80±10(%)

* Module Efficiency (%): Rounding to the nearest number

Electrical characteristics with 10% rear side power gain

Total Equivalent power -Pmax (Wp)	633	638	644	649	655	660
Open Circuit Voltage-Voc(V)	51.07	51.28	51.48	51.67	51.86	52.05
Short Circuit Current-Isc(A)	15.83	15.88	15.95	16.01	16.07	16.13
Maximum Power Voltage-Vmpp(V)	42.44	42.61	42.78	42.94	43.10	43.25
Maximum Power Current-Impp(A)	14.93	14.99	15.07	15.14	15.21	15.28

Rear side power gain: The additional gain from the rear side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

ELECTRICAL DATA (NMOT)

Model Number	RSM144-10-575BNDG	RSM144-10-580BNDG	RSM144-10-585BNDG	RSM144-10-590BNDG	RSM144-10-595BNDG	RSM144-10-600BNDG
Maximum Power-Pmax (Wp)	436.1	439.9	443.7	447.4	451.3	454.9
Open Circuit Voltage-Voc (V)	47.50	47.69	47.88	48.05	48.23	48.41
Short Circuit Current-Isc (A)	11.80	11.84	11.89	11.93	11.98	12.02
Maximum Power Voltage-Vmpp (V)	39.38	39.55	39.70	39.85	39.99	40.13
Maximum Power Current-Impp (A)	11.07	11.12	11.18	11.23	11.28	11.33

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	n-type
Cell configuration	144 cells (6×12×6×12)
Module dimensions	2384×1134×30mm
Weight	33.5kg
Superstrate	High Transmission, AR Coated Heat Strengthened Glass
Substrate	Heat Strengthened Glass
Frame	Anodized Aluminium Alloy, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² , Positive(+)350mm, Negative(-)230mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.046%/°C
Temperature Coefficient of Pmax	-0.30%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	30A
Limiting Reverse Current	30A



PACKAGING CONFIGURATION

	40ft(HQ)	20ft
Number of modules per container	720	144
Number of modules per pallet	36	36
Number of pallets per container	20	4
Packaging box dimensions (LxWxH) in mm	2395×1140×1260	2395×1140×1260
Box gross weight[kg]	1256	1256

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2023 Risen Energy. All rights reserved. Contents included in this datasheet are subject to change without notice.
No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document.

THE POWER OF RISING VALUE

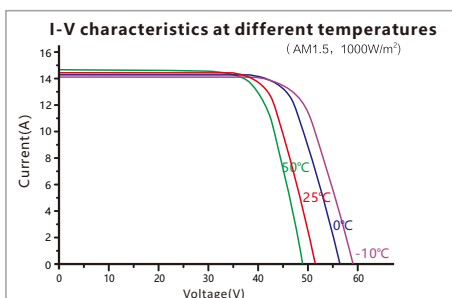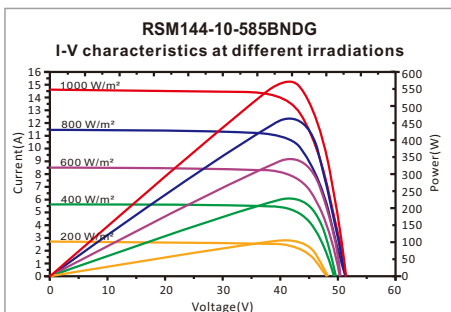

Our Partners: